




Date: April 1, 2021

Subject: Paper Color Change for 1 in. (25.4 mm) USG Sheetrock® Brand Mold Tough® Gypsum Liner Panels (UL Type SLX), Commodity Code #149566

To our valued customers,

This letter is to inform you that over the coming weeks, USG will be transitioning to the more recognizable green paper color for our 1 in. (25.4 mm) USG Sheetrock® Brand Mold Tough® Gypsum Liner Panels (UL Type SLX), which is consistent with all USG paper-faced Mold Tough® products that feature moisture and mold resistance.

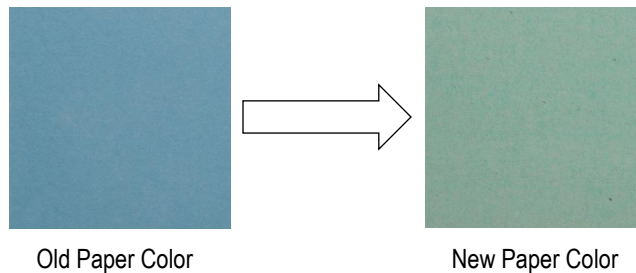

Please note that this visual paper color change **will not** impact the ordering commodity code (#149566), end tapes, printing on the panel, nor any existing performance characteristics:

- Feature a noncombustible, moisture-resistant gypsum core encased in moisture- and mold-resistant, 100% recycled face and back papers
- Quick score-and-snap, no sawing or special tools required
- Comprehensive product and system testing assures long-term performance and safety
- Double-beveled edges for easy installation
- Comply with ASTM C1396, *Standard Specification for Gypsum Board*, for 1 in. (25.4 mm), Type X and water-resistant gypsum shaftliner board
- When tested in accordance with ASTM D3273, *Standard Test Method for Resistance to Growth of Mold on the Surface of Interior Coatings in an Environmental Chamber*, the panels meet or exceed ASTM C1396 specifications
- Underwriters Laboratories Inc. (UL) Classification as to fire resistance, surface burning characteristics and noncombustibility
- Achieved GREENGUARD Gold Certification and qualifies as a low VOC emitting material (meets CA 01350)
- For more information, refer to USG literature [Sheetrock® Brand Mold Tough® Gypsum Liner Panels Submittal Sheet \(WB2389\)](#)

If you have any questions, please contact USG Customer Service at 800 950-3839, and we appreciate your continued support and look forward to serving you in the future.

Sincerely,

Kenneth W. Wagner
Product Manager, Wallboard